



SLIMLED LIGHTS

ACCENT LED LIGHTING

Simplicity and design are the cornerstones of these unique LED lights. Match the color of the faceplate to your decor for synchronicity.



KEY FEATURES

- Easy installation
- Extra-low profile
- Offered in 2 sizes, regular and mini

MODEL

4007FR	2.5W Single puck, 3000°K, 213 Lumens
4008FR	2.5W Single square light, 3000°K, 213 Lumens
4007MINIFR	1.7W Single puck, 3000°K, 145 Lumens
4008MINIFR	1.7W Single square light, 3000°K, 145 Lumens

SPECIFICATIONS

- 12V DC LED driver required.
- Over 50,000 hours of service life.
- 12" (30 cm) input lead with quick connector.
- 24" (61 cm) interconnection harness included.
- Solid steel heat sink.
- Frosted lens.
- Superior LED performance and lifespan.
- Dimmable with most low-voltage electronic dimmers when used with DALI dimming power supply.

INSTALLATION

- For surface installation only, in any direction.
- Ideal for accent lighting inside or under any cabinet, shelf or display.
- A variety of power supplies and installation accessories available.

FINISH

BK	Black
WH	White
CH	Chrome
SN	Satin nickel

POWER SUPPLIES — PLUG-IN


ETR-LED10WPI	12VDC/10W class 2 LED driver
ETR-LED24WPI	12VDC/24W class 2 LED driver

POWER SUPPLIES — HARD-WIRED

BT06DIMLED-IC	6W dimmable LED hardwire driver
BT12DIMLED-IC	12W dimmable LED hardwire driver
BT24DIMLED-IC	24W dimmable LED hardwire driver
BT36DIMLED	36W dimmable LED hardwire driver
BT48DIMLED	48W dimmable LED hardwire driver

ACCESSORIES

4000E-24	24" (61 cm) extension cord
4000E-60	60" (152.4 cm) extension cord
4000HRNS-24	24" (61 cm) interconnection harness

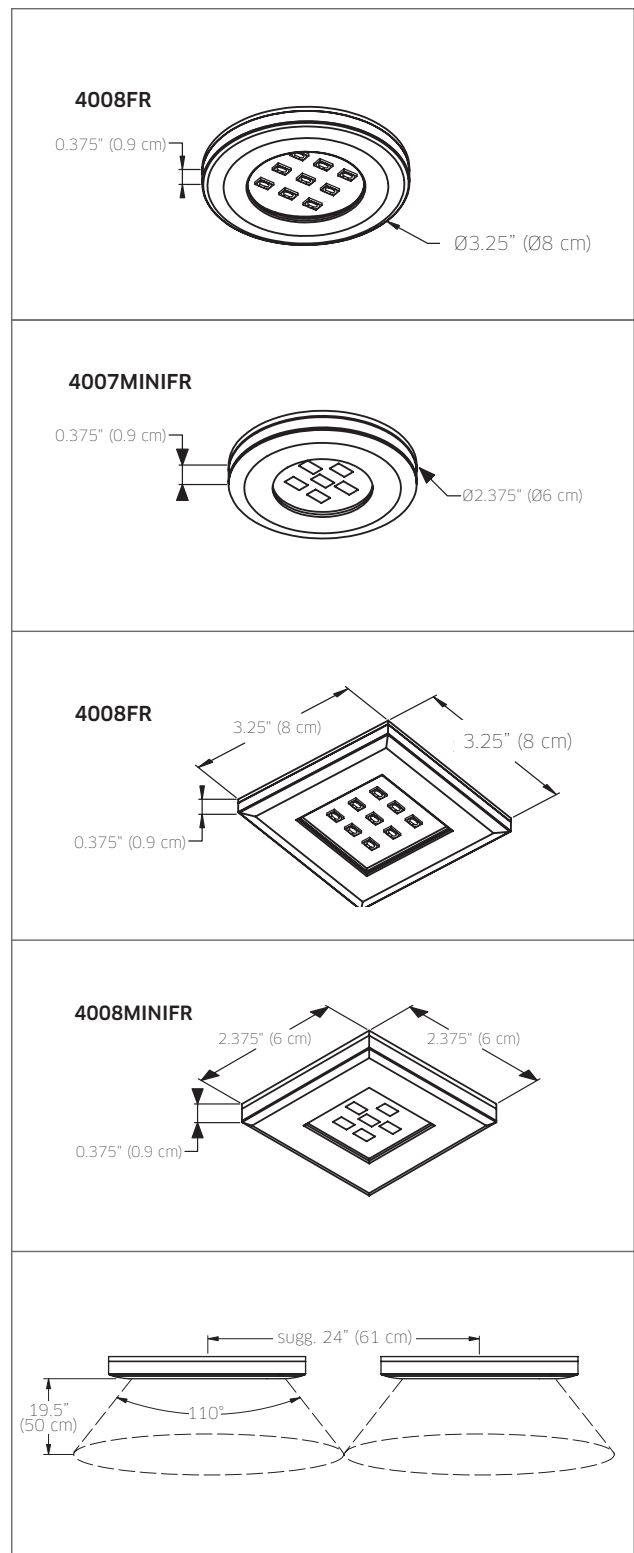

ORDERING EXAMPLE

4007FR-BK
Would order a 4007 single puck with a 2.5W LED array with 213 Lumens at 3000°K in a black finish.